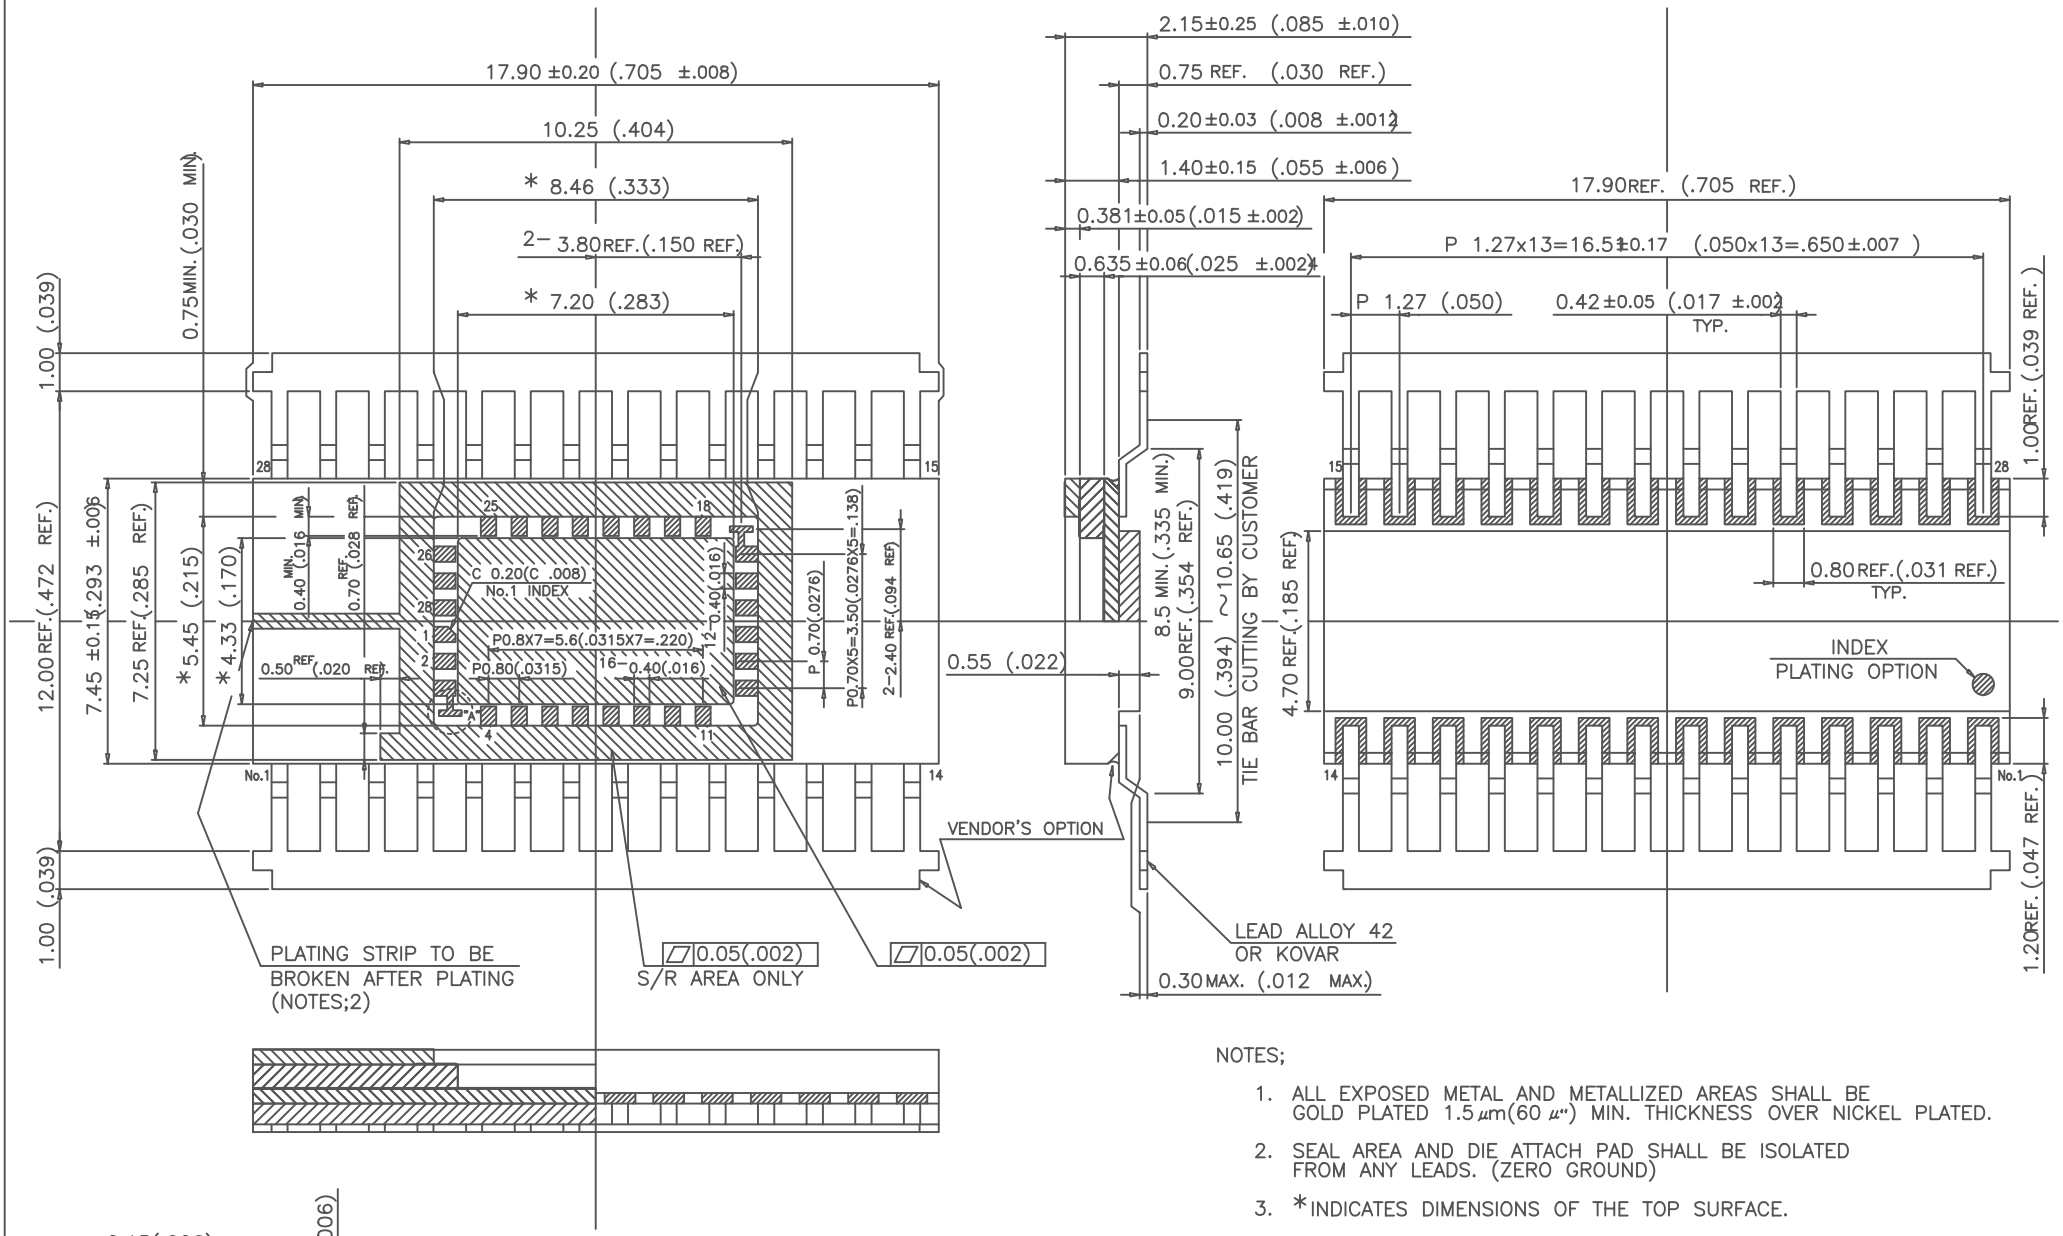

NOTES;

1. ALL EXPOSED METAL AND METALLIZED AREAS SHALL BE GOLD PLATED 1.5 μm (60 μ") MIN. THICKNESS OVER NICKEL PLATED.
2. SEAL AREA AND DIE ATTACH PAD SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)
3. * INDICATES DIMENSIONS OF THE TOP SURFACE.

MODIFICATIONS					
	CHANGE	DATE	DRAWN	CHECKED	APPROVED

NAME 28 LEAD S.O. PACKAGE	TOLERANCES: UNLESS OTHERWISE SPECIFIED ±0.13 (±.005) THIRD ANGLE PROJECTION	DRAWN S.T	CHECKED A.Y / K.T	APPROVED Y.S	DATE 10-24-'91
SCALE 10/1	MATERIAL KYOCERA A-440				
KYOCERA	KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO. PB-F88154			SHEET 1/1

S=0
D=0
POB-28F

PB-F86065-A (POA-28F) MOD.